




## Siłownik okrągły zagniatany PSOP D32-40



### Wymiary

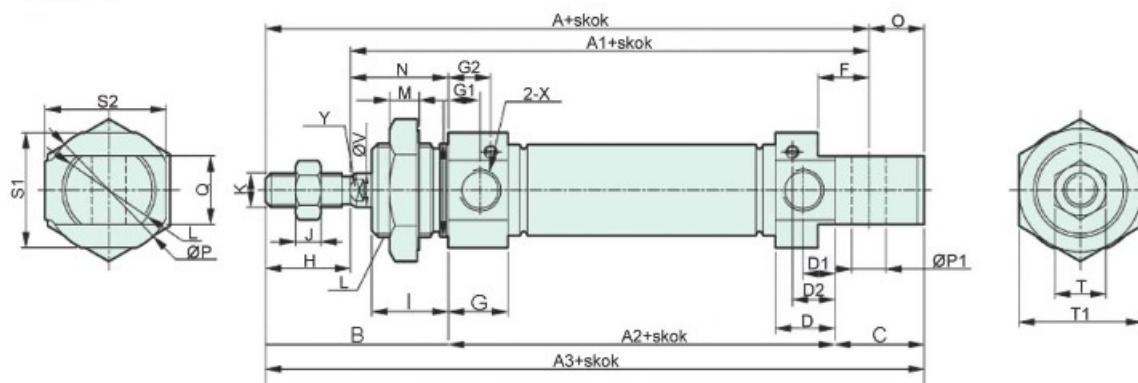

Ø mm	A	A1	A2	A3	B	C	D	D1	D2	F	G	G1	G2	H	I	J
32	135	113	72	147	48	27	17	8,5	12	15	17	8,5	12	22	18	6
40	138	115	72	150	51	27	16	8	11,5	15	16	8	11,5	23	20	8
Ø mm	K	L	M	N	O	P	P1	Q	R	S1	S2	T	T1	X	V	Y
32	M10x1,25	M27x2	9	26	12	38	10	20	27	35	36,5	17	36	G1/8	12	10
40	M14x1,5	M33x2	9	28	12	45	10	20	33	42	43,5	22	45	G1/4	16	14

<b>Ciśnienie pracy</b>	1 - 10 bar
<b>Medium</b>	przefiltrowane sprężone powietrze
<b>Smarowanie</b>	niewymagane
<b>Temperatura medium</b>	0°C do +40°C
<b>Temperatura otoczenia</b>	-10°C do +80°C
<b>Amortyzacja</b>	pneumatyczna
<b>Pokrywy</b>	anodowane aluminium
<b>Tłoczyisko</b>	stal nierdzewna
<b>Tuleja</b>	stal nierdzewna AISI 304
<b>Uszczelnienia</b>	PU / NBR