



Siłownik kompaktowy UNITOP PSKU

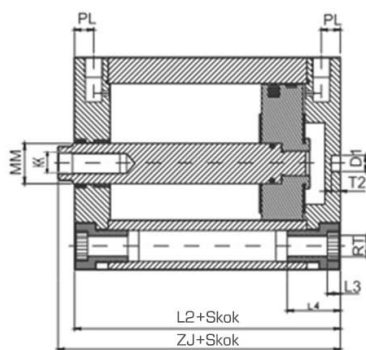

Ø tłoka (mm)	D1	E	EE	H	L2	L3	L4	MM	PL	RT	T2	TG	ZJ	CC1	A	KK
16	6	29	M5	1	40	4	18,5	8	8	M4	4	18	42	6	20	M4
20	6	35,5	M5	1,5	40	4	18,5	10	8	M5	4	22	42	8	22	M5
25	6	39,5	M5	1,5	41,5	4	18,5	10	8	M5	4	26	44,5	8	22	M5
32	6	49,5	G1/8	2	46,5	5	22	12	8	M6	4	32	50,5	10	22	M6
40	6	59,5	G1/8	2,5	47,5	5	22	12	8	M6	4	42	52	10	22	M6
50	6	68	G1/8	2,8	48,5	5	22	16	8	M8	4	50	54	14	24	M8
63	8	86	G1/8	4	52	6	26	16	8	M10	4	62	57	14	24	M8
80	8	106	G1/8	4	58	6	26	20	8,5	M10	4	82	63	17	32	M10

Ciśnienie pracy	1 - 10 bar
Medium	sprężone powietrze wg ISO 85731:2010 [7:4:4]
Temperatura pracy	-20°C do +80°C
Amortyzacja	mechaniczna
Pokrywy	aluminium
Tłoczysko	stal nierdzewna AISI304
Profil	aluminium
Standard	UNITOP
Uszczelnienia	PU / NBR